PELUSA SQUARE

PST 07 30 24 S ST W

Artech Pelusa Square Tilt Trim Downlight

Artech Pelusa Square LED downlight. Total luminous flux 700 lm with overall luminaire efficacy of 84 lm/W. Supplied with fixed output, DALI / DSI digital dimmable drivers for 8.3 W LED, optional - basic 3hr, self-test or EMPRO emergency kit. Die-cast aluminum body with white frame and white insert. Aluminum reflector and frosted glass for optic.

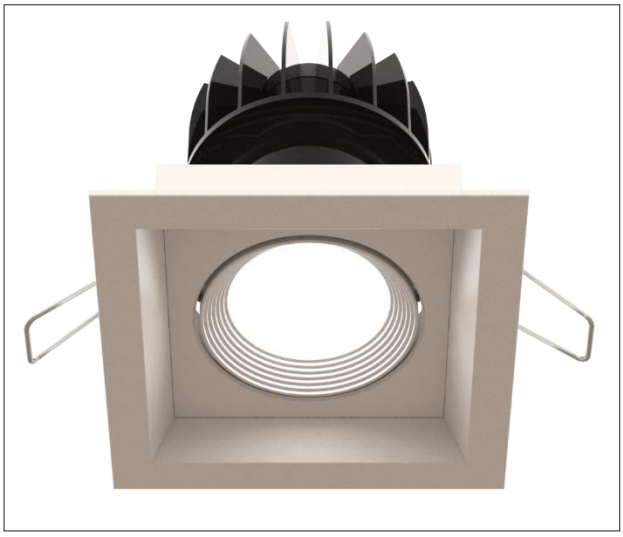

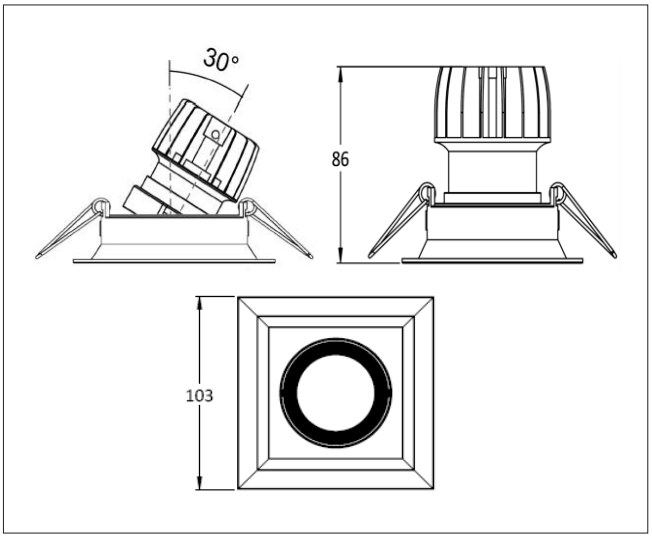

Mounting	Recessed (With Trim)
Lamp Type	LED
Wattage	8.3 W
Lumen Output	700 lm
Efficacy	84 lm/W
Colour Temperature	3000 K
CRI	90+
Beam Angle	24˚
IP Rating	IP44
Control Gear	Fixed Output
Dimensions	103 x 86 mm
Colour Finish	White
MacAdam	3
Service Lifetime	L80/B10- 55,000 Hrs

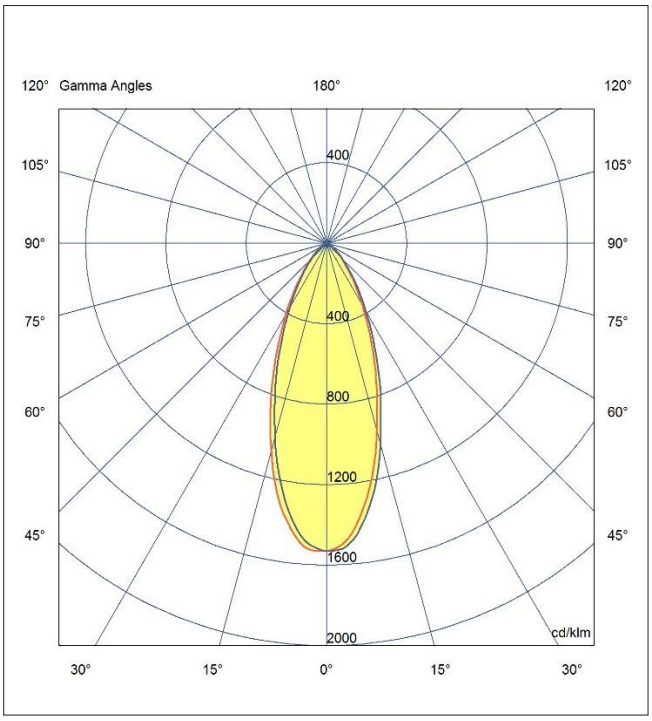

powered by

TRIDONIC

Driver details available upon request

Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%.Colour Temperature is subject to a tolerance of +/-150 Kelvin

St.JohnsRd,MeadowfieldIndustrialEstate,Durham,Co.Durham,DH78RJ-UnitedKingdom|T:+44(0)1913787960-F:+44(0)1913787909-www.artechlighting.com

MADE IN BRITAIN