


# TENUS 197

TRF 26 40 90 CL 197 TL WW




## Artech Tenus Round Recessed Trimless Downlight

Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 2560 lm with overall luminaire efficacy of 125 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel

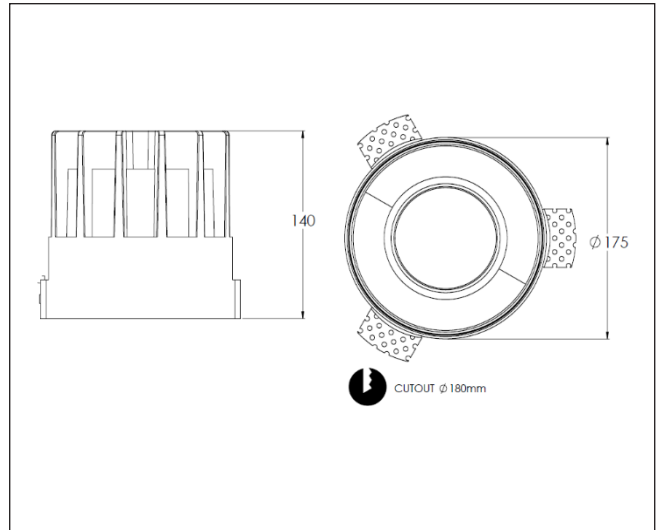

<b>Mounting</b>	Recessed (Trimless)
<b>Lamp Type</b>	LED
<b>Wattage</b>	20.5 W
<b>Lumen Output</b>	2560 lm
<b>Efficacy</b>	125 lm/W
<b>Colour Temperature</b>	4000 K
<b>CRI</b>	90+
<b>Beam Angle/ Optic</b>	90°/ Clear
<b>IP Rating</b>	IP44
<b>Control Gear</b>	Fixed Output
<b>Dimensions</b>	175 Dia x 140 mm
<b>Colour Finish</b>	White/ White
<b>MacAdam</b>	3
<b>Service Lifetime</b>	L80/B10-55,000 Hrs

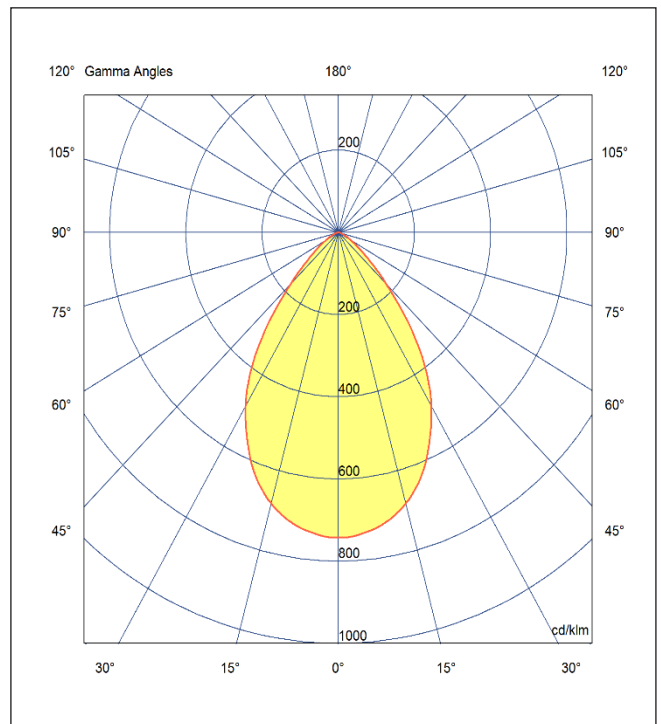

powered by

**TRIDONIC**

Driver details available upon request



Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ – United Kingdom T: +44(0) 191 3787960 E: [info@artechlighting.com](mailto:info@artechlighting.com) W: [www.artechlighting.com](http://www.artechlighting.com)

