


TENUS 197

TRF 34 40 90 CL 197 TL WW




Artech Tenus Round Recessed Trimless Downlight

Artech Tenus recessed architectural fixed LED downlight with ingress protection IP44. Total luminous flux up to 3360 lm with overall luminaire efficacy of 125 lm/W. Supplied with fixed output, DALI digital or phase-cut dimmable driver, optional 3 -hour Basic or EMPRO emergency kit. Forged aluminum heat sink with die-cast white or black bezel

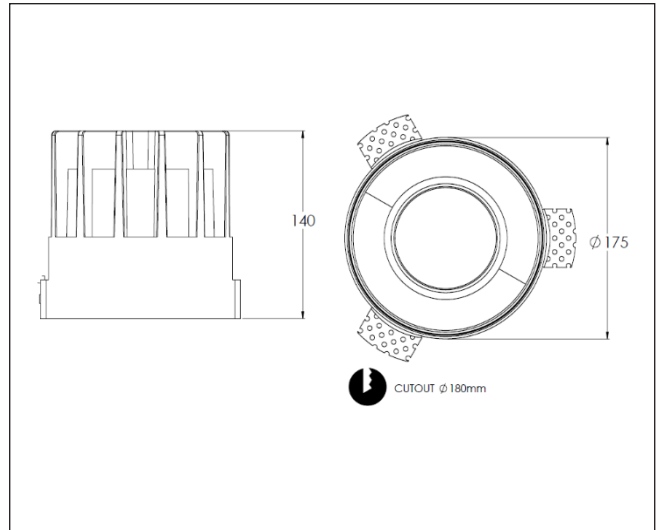

Mounting	Recessed (Trimless)
Lamp Type	LED
Wattage	26.8 W
Lumen Output	3360 lm
Efficacy	125 lm/W
Colour Temperature	4000 K
CRI	90+
Beam Angle/ Optic	90°/ Clear
IP Rating	IP44
Control Gear	Fixed Output
Dimensions	175 Dia x 140 mm
Colour Finish	White/ White
MacAdam	3
Service Lifetime	L80/B10-55,000 Hrs

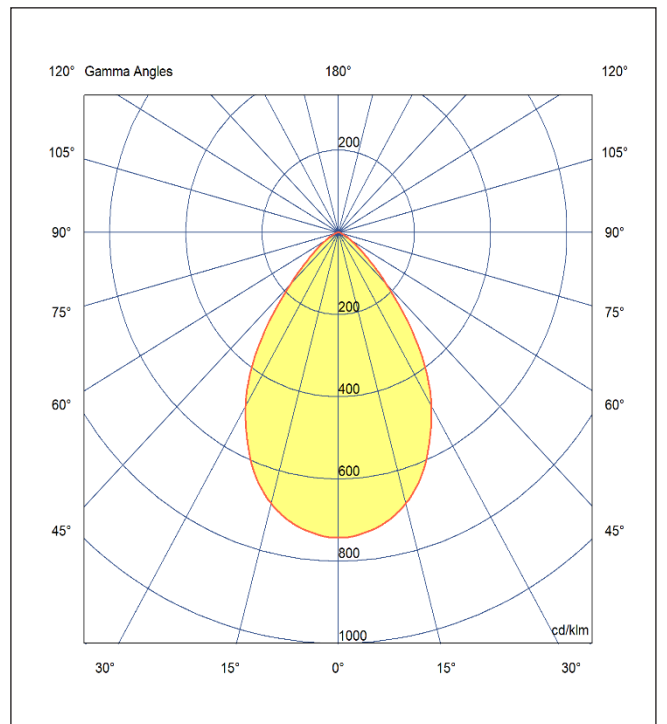

powered by

TRIDONIC

Driver details available upon request



Artech lighting strives to ensure all solutions are supplied with the latest technology, we therefore reserve the right to make technical and design changes without prior notice. Electrical connected load and luminous flux are subject to initial tolerance of up +/- 10%. Colour Temperature is subject to a tolerance of +/-150 Kelvin

St Johns Rd, Meadowfield Ind. Estate, Durham, Co. Durham, DH7 8RJ – United Kingdom T: +44(0) 191 3787960 E: info@artechlighting.com W: www.artechlighting.com

